

DS21Q348DK

3.3V E1/T1/J1 Line Interface Design Kit

www.maxim-ic.com

GENERAL DESCRIPTION

The DS21Q348 design kit is an evaluation board for the DS21Q348 3.3V E1/T1/J1 line interface. The DS21Q348DK is intended to be used as a daughter card with either the DK2000 or the DK101 motherboards. The board comes complete with a line interface unit (LIU), transformers, termination resistors, configuration switches, network connectors, and an interface to the motherboard.

ORDERING INFORMATION

PART	DESCRIPTION
DS21Q348DK	DS21Q348 (Quad BGA) Design Kit

FEATURES

- Expedites New Designs by Eliminating First-Pass Prototyping
- Interfaces Directly to DK101 or DK2000 Motherboards
- Demonstrates Key Functions of the DS21Q348
- High-Level Software Provides Visual Access to Registers
- Software-Controlled (Register Mapped) Configuration Switches to Facilitate Clock and Signal Routing
- BNC Connections for 75Ω E1
- Bantam and RJ48 Connectors for 120Ω E1 and 100Ω T1
- Multitap Transformer Facilitates True Impedance Matching for 75Ω and 120Ω/100Ω Paths



COMPONENT LIST

DESIGNATION	QTY	DESCRIPTION	SUPPLIER	PART
1	1	3.3V E1/T1/J1 line interface, 0°C to +70°C, 144-pin BGA	Dallas Semiconductor	DS21Q348
C1, C2, C6, C10, C12, C22, C24	7	0.47 μ F, 25V, 10% 1206 ceramic	Digi-Key	PCC1891CT-ND
C13–C16	4	0.1 μ F, 25V, 10% 1206 ceramic	Digi-Key	PCC1883CT-ND
C17–C20	4	1 μ F, 16V, 10% 1206 ceramic	Digi-Key	PCC1882CT-ND
C3–C5, C7, C8, C11, C21, C23, C25, C26	10	0.1 μ F, 16V, 10% 0603 ceramic	Digi-Key	311-1088-1-ND
C9	1	10 μ F, 16V, 20% B case tantalum	Digi-Key	PCS3106CT-ND
DS1–DS5	5	LED, red, SMD	Digi-Key	P500CT-ND
J1, J6–J13	9	Connector BNC RA, 5-pin	Kruidand	UCBJR220
J14	1	RA RJ45, 8-pin, 4-port jack	Molex	43223-8140
J15, J16	2	Socket, SMD, 50-pin, dual row, vertical	Samtec	TFM-125-02-S-D-LC
J2	1	Connector, 10-pin, dual row, vertical	Digi-Key	S2012-05-ND
J3–J5	—	8-row by 2-column pin strip, 0.1" centers, 0.025" post	NA	Lab Stock
R17, R20, R21, R25, R28–R36, R53	14	10k Ω , 1/10W, 1% RES 0805	Digi-Key	P10.0KCCT-ND
R18, R19, R22–R24, R26, R27	7	51.1 Ω , 1/10W, 1% RES 0805	Digi-Key	P51.1CCT-ND
R1–R16, R37–R41, R54–R57	25	0 Ω , 1/8W, 5% RES 1206	Digi-Key	P0.0ETR-ND
R42, R43	2	1.0k Ω , 1/10W, 1% RES 0805	Digi-Key	P1.00KCCT-ND
R44–R51	8	61.9 Ω , 1/8W, 1% RES 1206	Digi-Key	P61.9FCT-ND
T1–T4	4	XFMR, dual, 16-pin SMT	Pulse Engineering	TX1099
U1	1	Xilinx CPLD 72 macrocell, 100-pin TQFP, 3.3V	Avnet	XC95142XL-10TQ100C

BASIC OPERATION

Hardware Configuration

Using the DK101 Processor Board

- Connect TIM card to the DK101 processor board.
- Supply 3.3V to the banana-plug receptacles marked GND and VCC_3.3V. (The external 5V connector is unused. Additionally, the TIM 5V supply headers are unused.)
- All processor-board DIP switch settings should be in the ON position with the exception of the flash-programming switch, which should be OFF.
- From the Programs menu launch the host application named DCOM.EXE.

Using the DK2000 Processor Board

- Connect TIM card to the DK2000 processor board.
- Connect J1 to the power supply that is delivered with the kit. Alternately, a PC power supply can be connected to connector J2.
- From the Programs menu launch the host application named DCOM.EXE.

General

- Upon power-up, the RCL LEDs are lit, and the INT LED is off.
- After power-up, the RCL LEDs extinguish upon external loopback.

Quick Setup (Register View)

- The PC loads the program, offering a choice between DEMO MODE, REGISTER VIEW, and TERMINAL MODE. Select Register View.
- The program requests a definition file. Select DS21Q348DK02A0_CPLD.DEF.
- The Register View Screen appears, showing the register names, acronyms, and values. Note the CPLD def file contains a link such that the def file for the DS21Q348 is also loaded. Selection among the def files is accomplished using the drop-down box on the right-hand side of the program window.
- From the drop-down box select the DS21Q348 def file and configure register CCR3 of ports 1 through 4 with a 90h.
 - The device begins transmitting a pseudorandom bit sequence. Upon external loopback, the RCL LED extinguishes, denoting that the device has found a carrier and has successfully decoded the pseudorandom bit sequence. For more advanced configurations, please refer to the DS21Q348 data sheet.

Miscellaneous

- Clock frequencies are provided by a register-mapped CPLD, which is on the DS21Q348 TIM card.
- The definition file for this CPLD is named *DS21Q348DK02A0_CPLD.def*. See *CPLD Register Map* definitions.

ADDRESS MAP

DK101 TIM card address space begins at 0x81000000.

DK2000 TIM card address space begins at:

- 0x30000000 for slot 0
- 0x40000000 for slot 1
- 0x50000000 for slot 2
- 0x60000000 for slot 3

All offsets in the *TIM Card Address Map* table are relative to the beginning of the TIM card address space.

TIM Card Address Map

OFFSET	DEVICE	FUNCTION
0X0000 to 0X0015	CPLD	Board ID, clock and signal routing
0X2000 to 0X2015	LIU Port 1	Board is populated with either the DS21Q348 or the DS21448. Please see the factory data sheet for details.
0X3000 to 0X3015	LIU Port 2	
0X4000 to 0X4015	LIU Port 3	
0X5000 to 0X5015	LIU Port 4	

Registers in the CPLD can be easily modified using the DCOM host-based user-interface software with the definition file named *ds21q348dk02A0_cpld.def*. This file is included as part of the design kit documentation download (accessed through the DS21Q348's quick view data sheet). The definition file for the LIU is named *DS21Q348.def*.

CPLD Register Map

OFFSET	REGISTER	TYPE	FUNCTION
0X0000	BID	Read-Only	Board ID
0X0001	—	—	Unused
0X0002	XBIDH	Read-Only	High Nibble Extended Board ID
0X0003	XBIDM	Read-Only	Middle Nibble Extended Board ID
0X0004	XBIDL	Read-Only	Low Nibble Extended Board ID
0X0005	BREV	Read-Only	Board FAB Revision
0X0006	AREV	Read-Only	Board Assembly Revision
0X0007	PREV	Read-Only	PLD Revision
0X0011	MCLK_SRC	Read-Write	MCLK Source Register
0X0012	TCLK1_SRC	Read-Write	TCLK1 Source Register
0X0013	TCLK2_SRC	Read-Write	TCLK2 Source Register
0X0014	TCLK3_SRC	Read-Write	TCLK3 Source Register
0X0015	TCLK4_SRC	Read-Write	TCLK4 Source Register

ID Registers

OFFSET	NAME	FUNCTION
0X0000	BID	Board ID. BID is read-only with a value of 0xD.
0X0002	XBIDH	High Nibble Extended Board ID. XBIDH is read-only with a value of 0x00.
0X0003	XBIDM	Middle Nibble Extended Board ID. XBIDM is read-only with a value of 0x02.
0X0004	XBIDL	Low Nibble Extended Board ID. XBIDL is read-only with a value of 0x00.
0X0005	BREV	Board FAB Revision. BREV is read-only and displays the current fab revision.
0X0006	AREV	Board Assembly Revision. AREV is read-only and displays the assembly revision.
0X0007	PREV	PLD Revision. PREV is read-only and displays the current PLD firmware revision.

Control Registers

The control registers are used set the clock frequency on the MCLK and TCLK pins. Options are 1.544MHz, 2.048MHz, external source (through AUX CLK BNC), and tri-state.

MCLK_SRC: MCLK SOURCE (OFFSET = 0x0011) INITIAL VALUE = 0x1

(MSB)							(LSB)
—	—	—	—	HI_Z	EXTOSC	2048MHZ	1544MHZ

NAME	POSITION	FUNCTION
HI_Z	MCLK_SRC.3	1 = Tri-state MCLK.
EXTOSC	MCLK_SRC.2	1 = Connect MCLK to the external oscillator.
2048MHZ	MCLK_SRC.1	1 = Connect MCLK to the 2.048MHz clock.
1544MHZ	MCLK_SRC.0	1 = Connect MCLK to the 1.544MHz clock.

TCLK1_SRC: TCLK SOURCE (OFFSET = 0x0012) INITIAL VALUE = 0x1

(MSB)							(LSB)
—	—	—	—	HI_Z	EXTOSC	2048MHZ	1544MHZ

NAME	POSITION	FUNCTION
HI_Z	TCLK1_SRC.3	1 = Tri-state TCLK1.
EXTOSC	TCLK1_SRC.2	1 = Connect TCLK1 to the external oscillator.
2048MHZ	TCLK1_SRC.1	1 = Connect TCLK1 to the 2.048MHz clock.
1544MHZ	TCLK1_SRC.0	1 = Connect TCLK1 to the 1.544MHz clock.

TCLK2_SRC: TCLK SOURCE (OFFSET = 0x0013) INITIAL VALUE = 0x1

(MSB)							(LSB)
—	—	—	—	HI_Z	EXTOSC	2048MHZ	1544MHZ

NAME	POSITION	FUNCTION
HI_Z	TCLK2_SRC.3	1 = Tri-state TCLK2.
EXTOSC	TCLK2_SRC.2	1 = Connect TCLK2 to the external oscillator.
2048MHZ	TCLK2_SRC.1	1 = Connect TCLK2 to the 2.048MHz clock.
1544MHZ	TCLK2_SRC.0	1 = Connect TCLK2 to the 1.544MHz clock.

TCLK3_SRC: TCLK SOURCE (OFFSET = 0x0014) INITIAL VALUE = 0x1

(MSB)							(LSB)
—	—	—	—	HI_Z	EXTOSC	2048MHZ	1544MHZ

NAME	POSITION	FUNCTION
HI_Z	TCLK3_SRC.3	1 = Tri-state TCLK3.
EXTOSC	TCLK3_SRC.2	1 = Connect TCLK3 to the external oscillator.
2048MHZ	TCLK3_SRC.1	1 = Connect TCLK3 to the 2.048MHz clock.
1544MHZ	TCLK3_SRC.0	1 = Connect TCLK3 to the 1.544MHz clock.

TCLK4_SRC: TCLK SOURCE (OFFSET = 0x0015) INITIAL VALUE = 0x1

(MSB)							(LSB)
—	—	—	—	HI_Z	EXTOSC	2048MHZ	1544MHZ

NAME	POSITION	FUNCTION
HI_Z	TCLK4_SRC.3	1 = Tri-state TCLK4.
EXTOSC	TCLK4_SRC.2	1 = Connect TCLK4 to the external oscillator.
2048MHZ	TCLK4_SRC.1	1 = Connect TCLK4 to the 2.048MHz clock.
1544MHZ	TCLK4_SRC.0	1 = Connect TCLK4 to the 1.544MHz clock.

DS21Q348 INFORMATION

For more information about the DS21Q348, please consult the DS21Q348 data sheet available on our website, www.maxim-ic.com/telecom.

TECHNICAL SUPPORT

For additional technical support, please email your questions to telecom.support@dalsemi.com.

DS21Q348 DESIGN KIT

DS21Q348DK02A0

CONTENTS

1. COVER PAGE
2. DS21Q348
3. PROCESSOR INTERFACE
4. PROGRAMABLE LOGIC AND PIN BIAS
- 5-8. LINE INTERFACE FOR PORTS 1--4
9. DIGITAL INTERFACE FOR PORTS 1--4
10. NETLIST CROSS REFERENCE
11. PART CROSS REFERENCE

TITLE:	DATE:
DS21Q348 DESIGN KIT	07/15/02
ENGINEER:	PAGE:
SWS	1 OF 11

DS21Q348 3.3V E1/T1/J1 LINE INTERFACE. 100 PIN MULTI-CHIP MODULE (BGA)


CS1 J3 CS<1>
CS2 D3 CS<2>
CS3 D10 CS<3>
CS4 K10 CS<4>
ALE K2 ALE_AS
RD J2 RD_DS
WR H1 WR_R/W
D_AD0 D5 AD<0>
D_AD1 F3 AD<1>
D_AD2 D4 AD<2>
D_AD3 E3 AD<3>
D_AD4 J9 AD<4>
D_AD5 G11 AD<5>
D_AD6 H10 AD<6>
D_AD7 J10 AD<7>

DS21Q348
CONTROL


TEST K7 TEST
MCLK J6 MCLK
VSM G4 VSM
HRST L9 DS214B_RESET
BIS0 L7 BIS0
BIS1 M8 BIS1
PBTS M12 PBTS
INT K9 INT
A<0> G12 A0
A<1> H12 A1
A<2> H11 A2
A<3> L1 A3
A<4> K1 A4


J5
D2
G9
M9
L5
E4
D8
J8
V3_3

J1
K3
H9
D9
F4
M4
L10
E9
D1
J4
T1

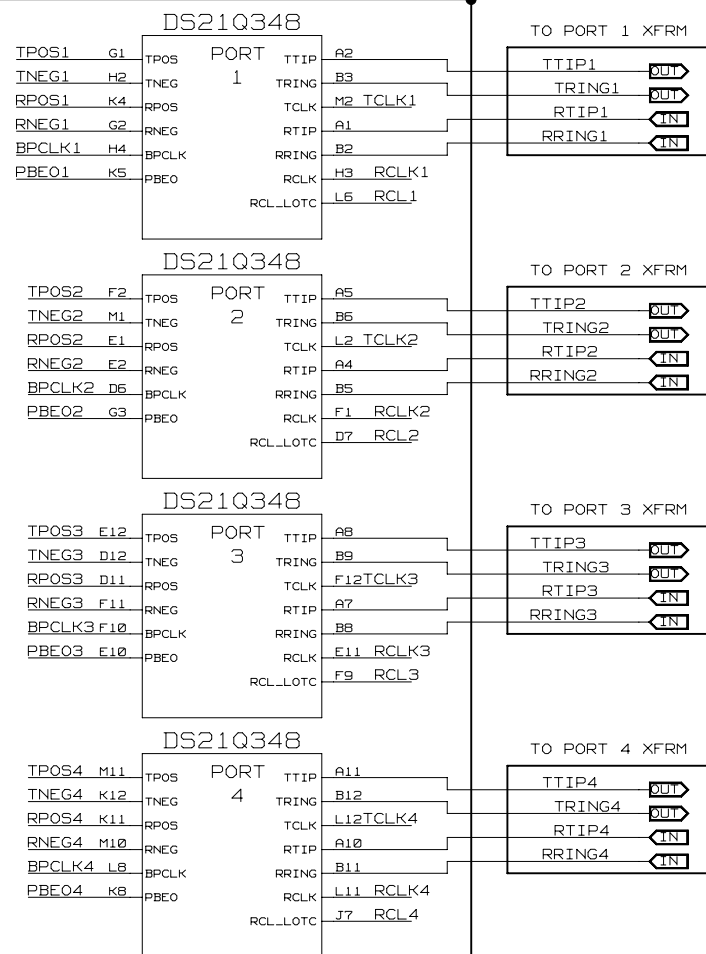


TITLE:	DATE:
DS21Q348 DESIGN KIT	07/15/02
ENGINEER:	PAGE:
SWS	2 OF 11

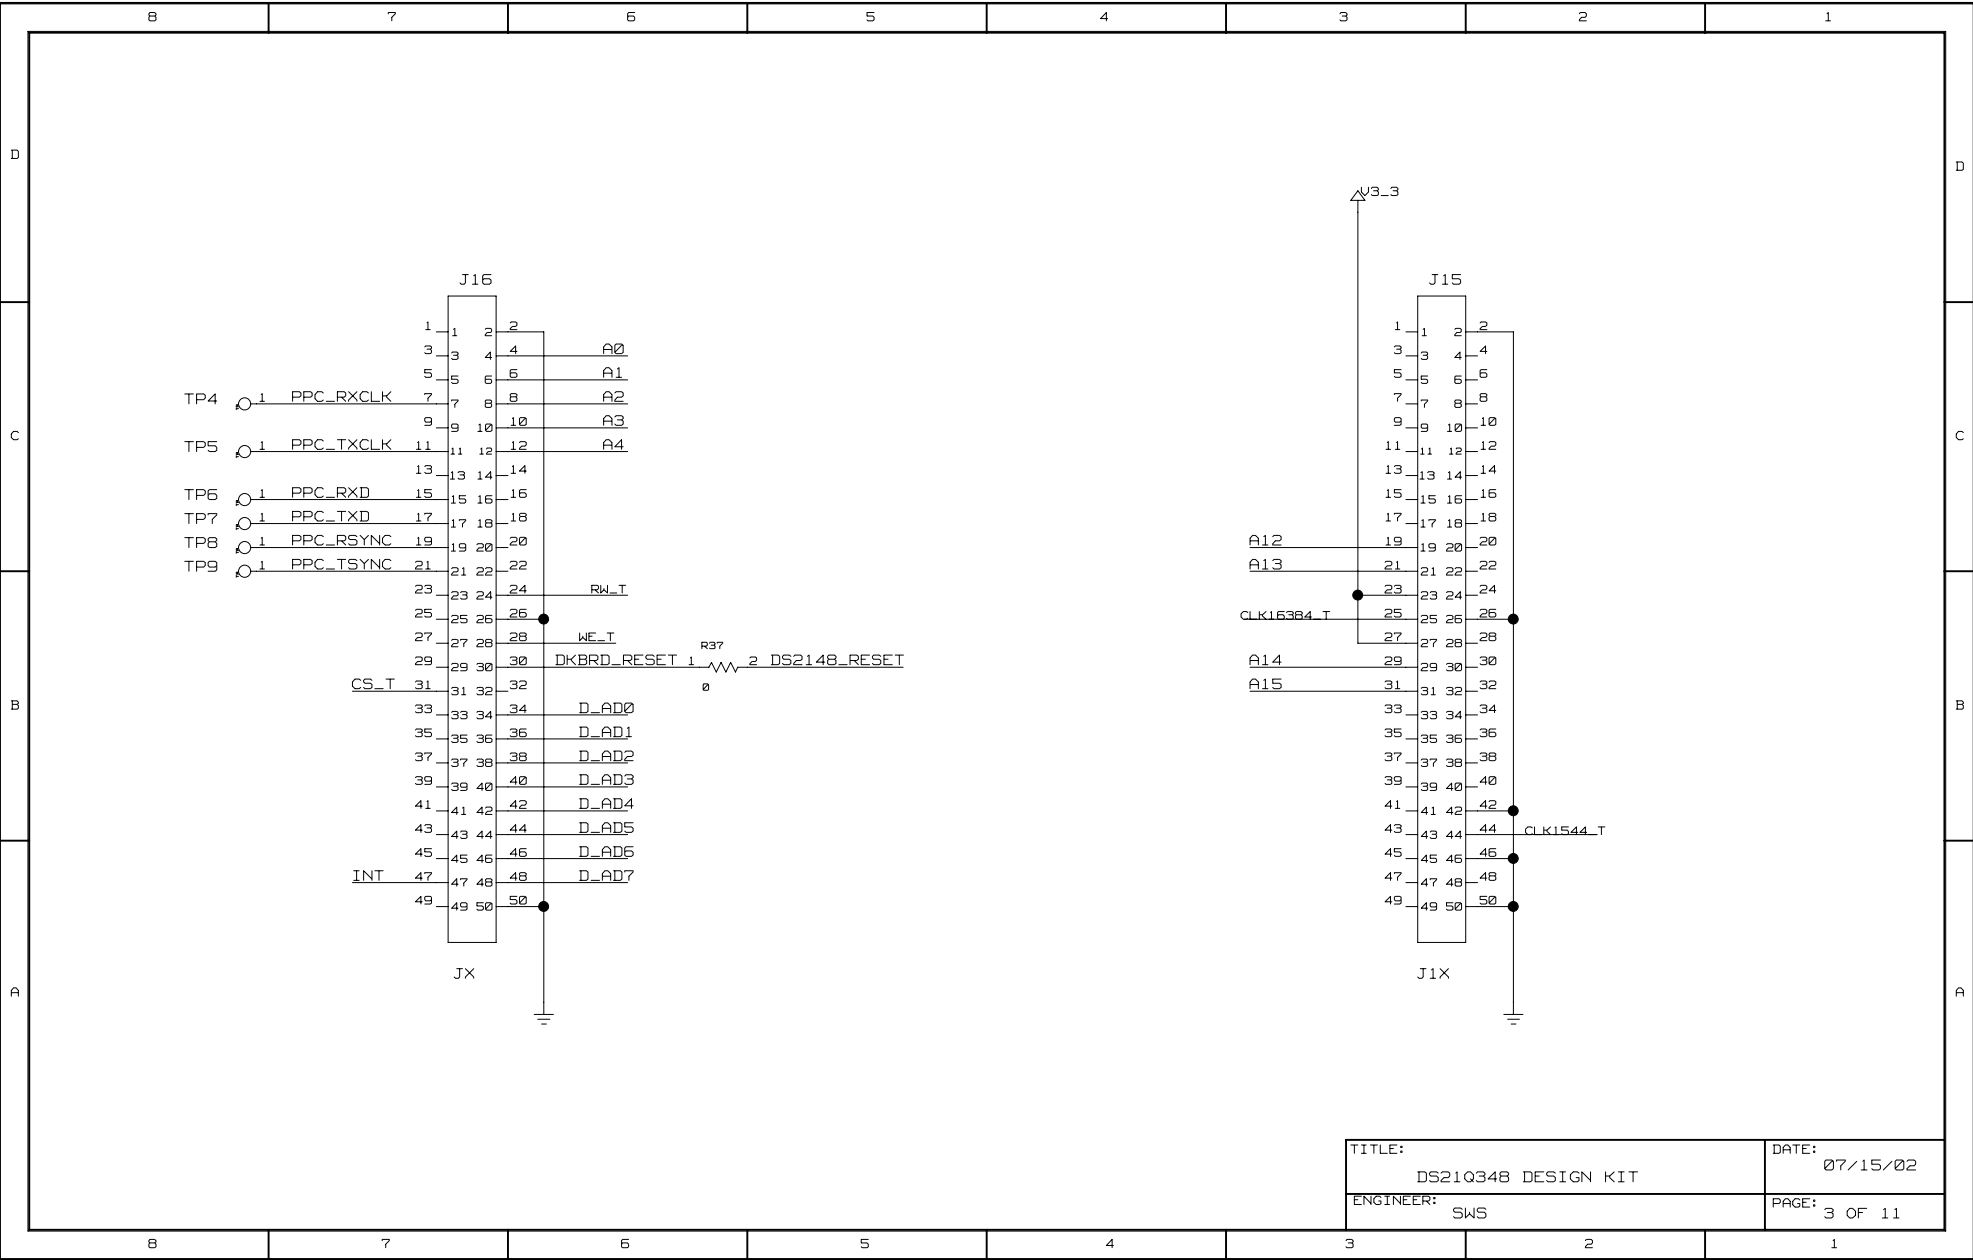






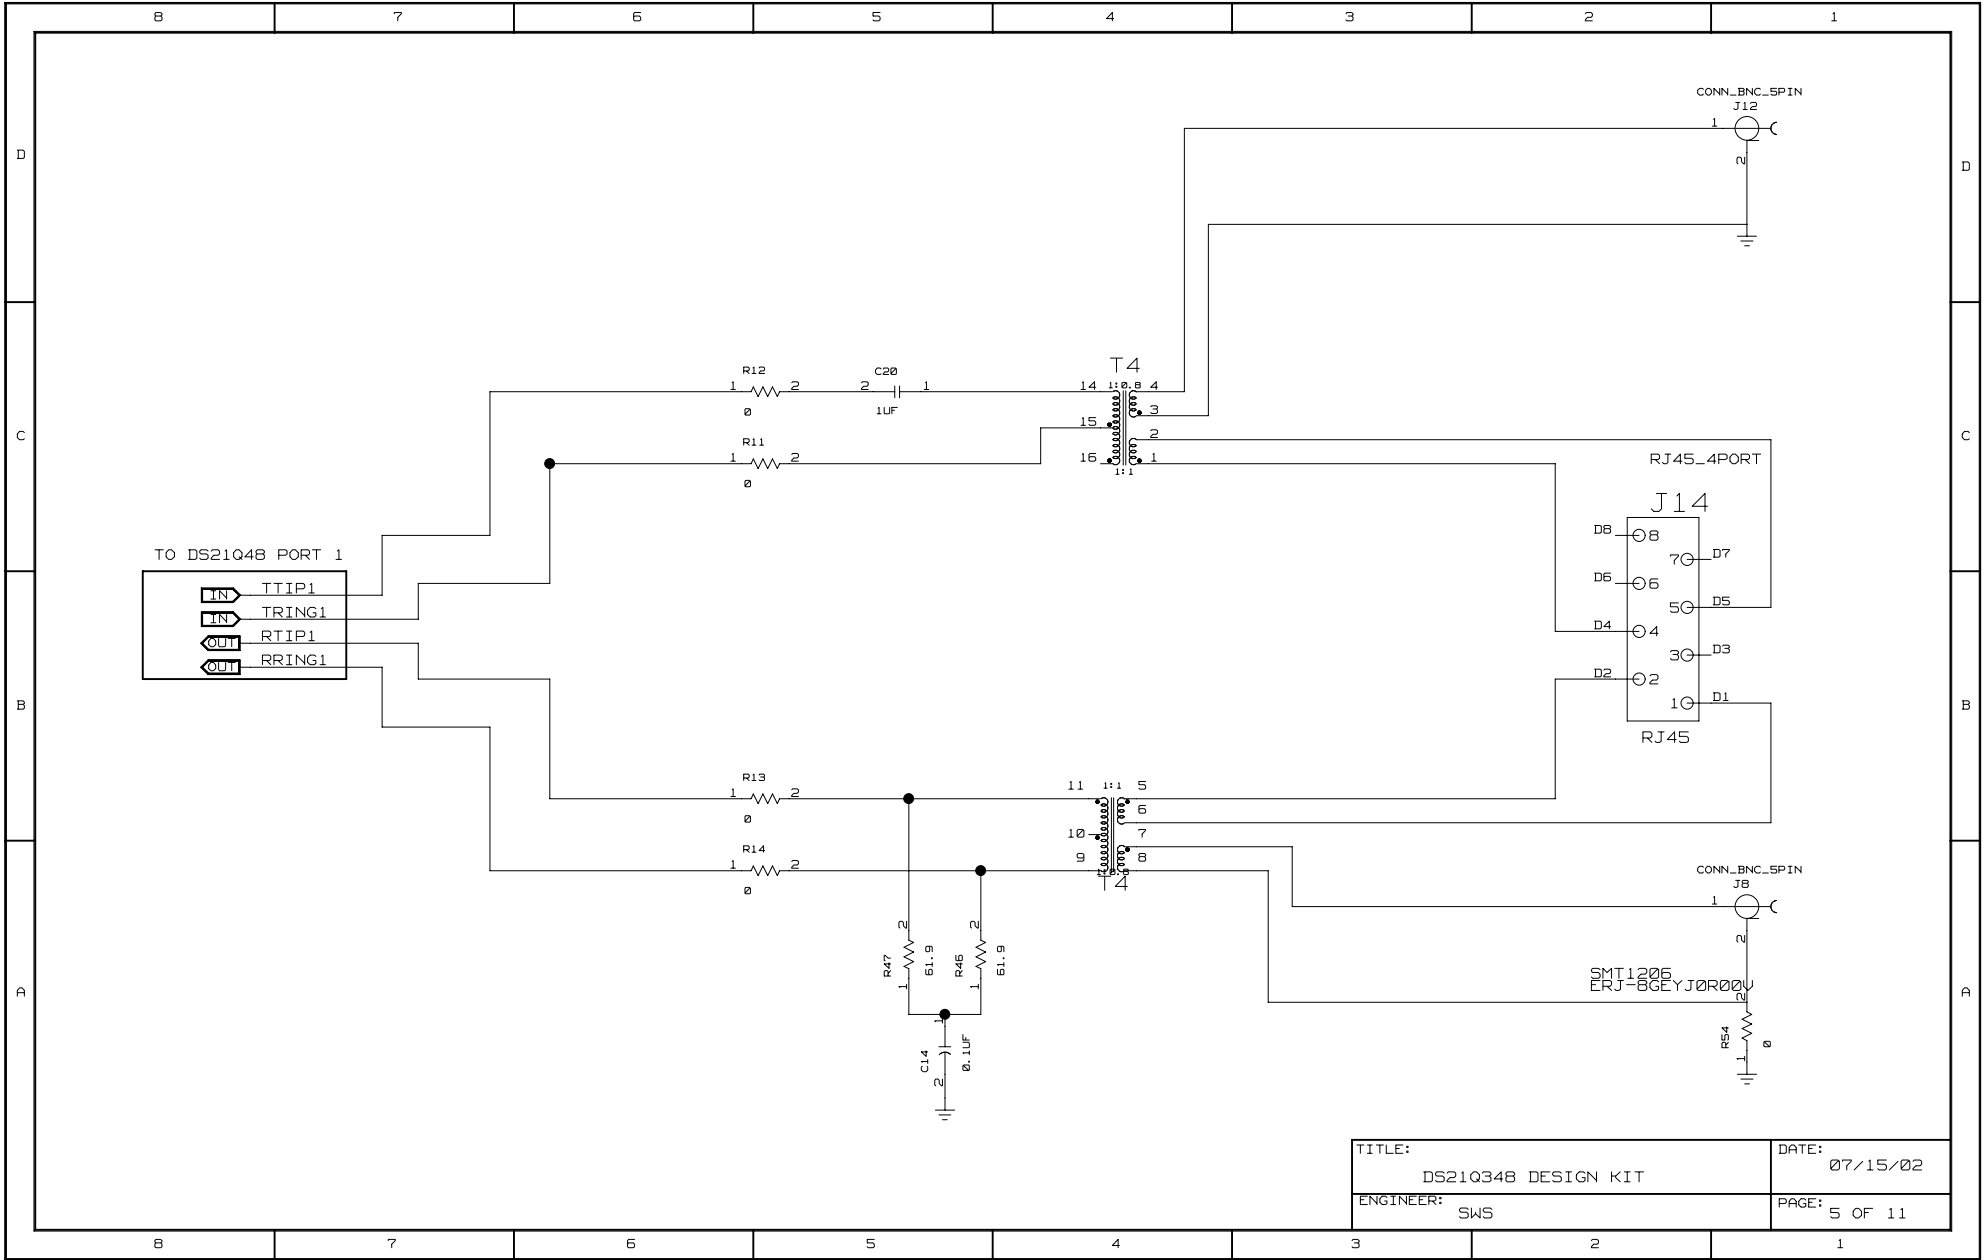


TITLE:	DS21Q348 DESIGN KIT	DATE:	07/15/02
ENGINEER:	SWS	PAGE:	5 OF 11

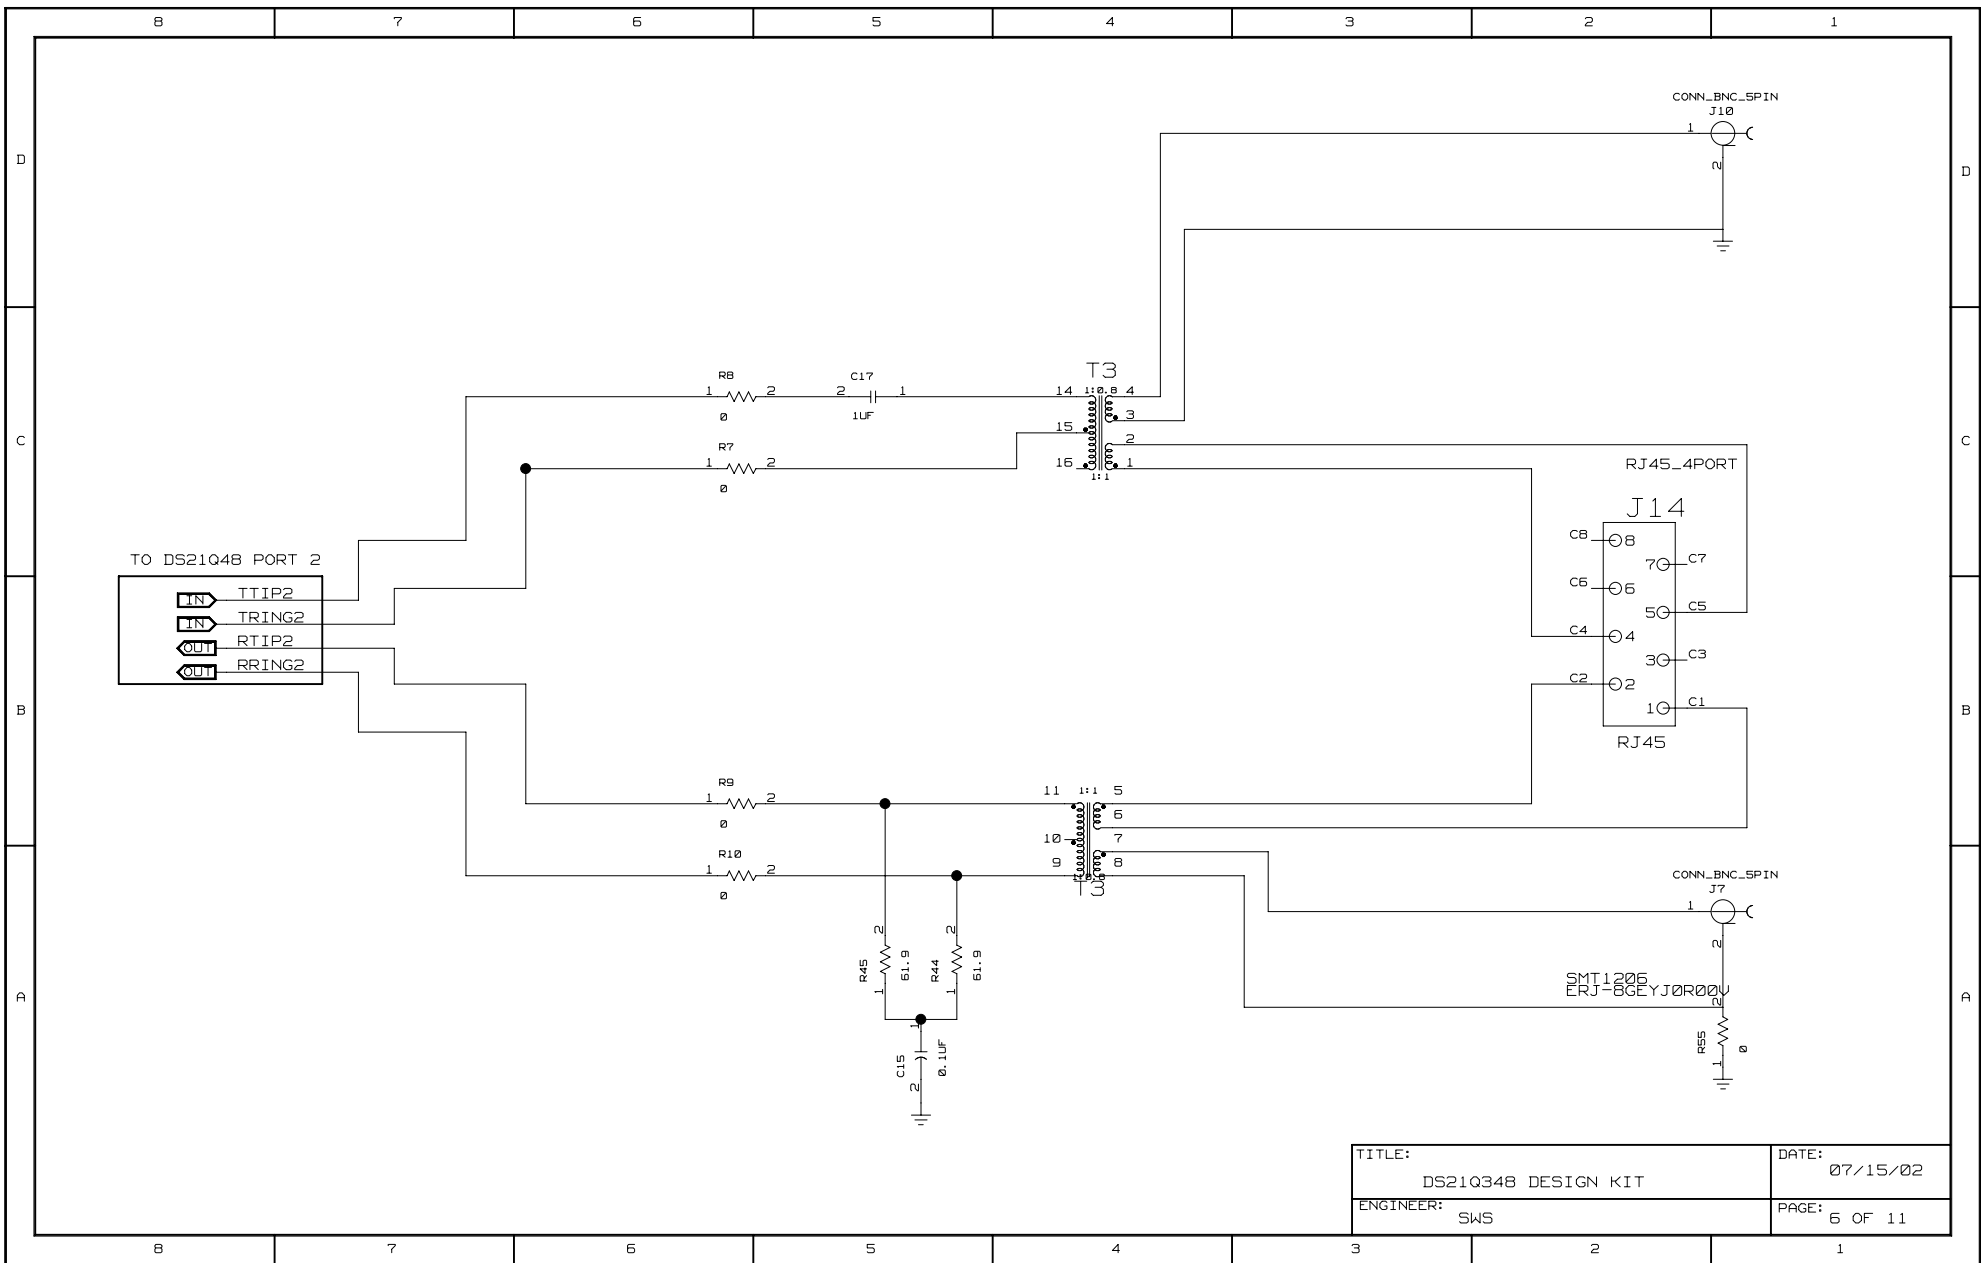

TITLE: DS21Q348 DESIGN KIT	DATE: 07/15/02
ENGINEER: SWS	PAGE: 6 OF 11

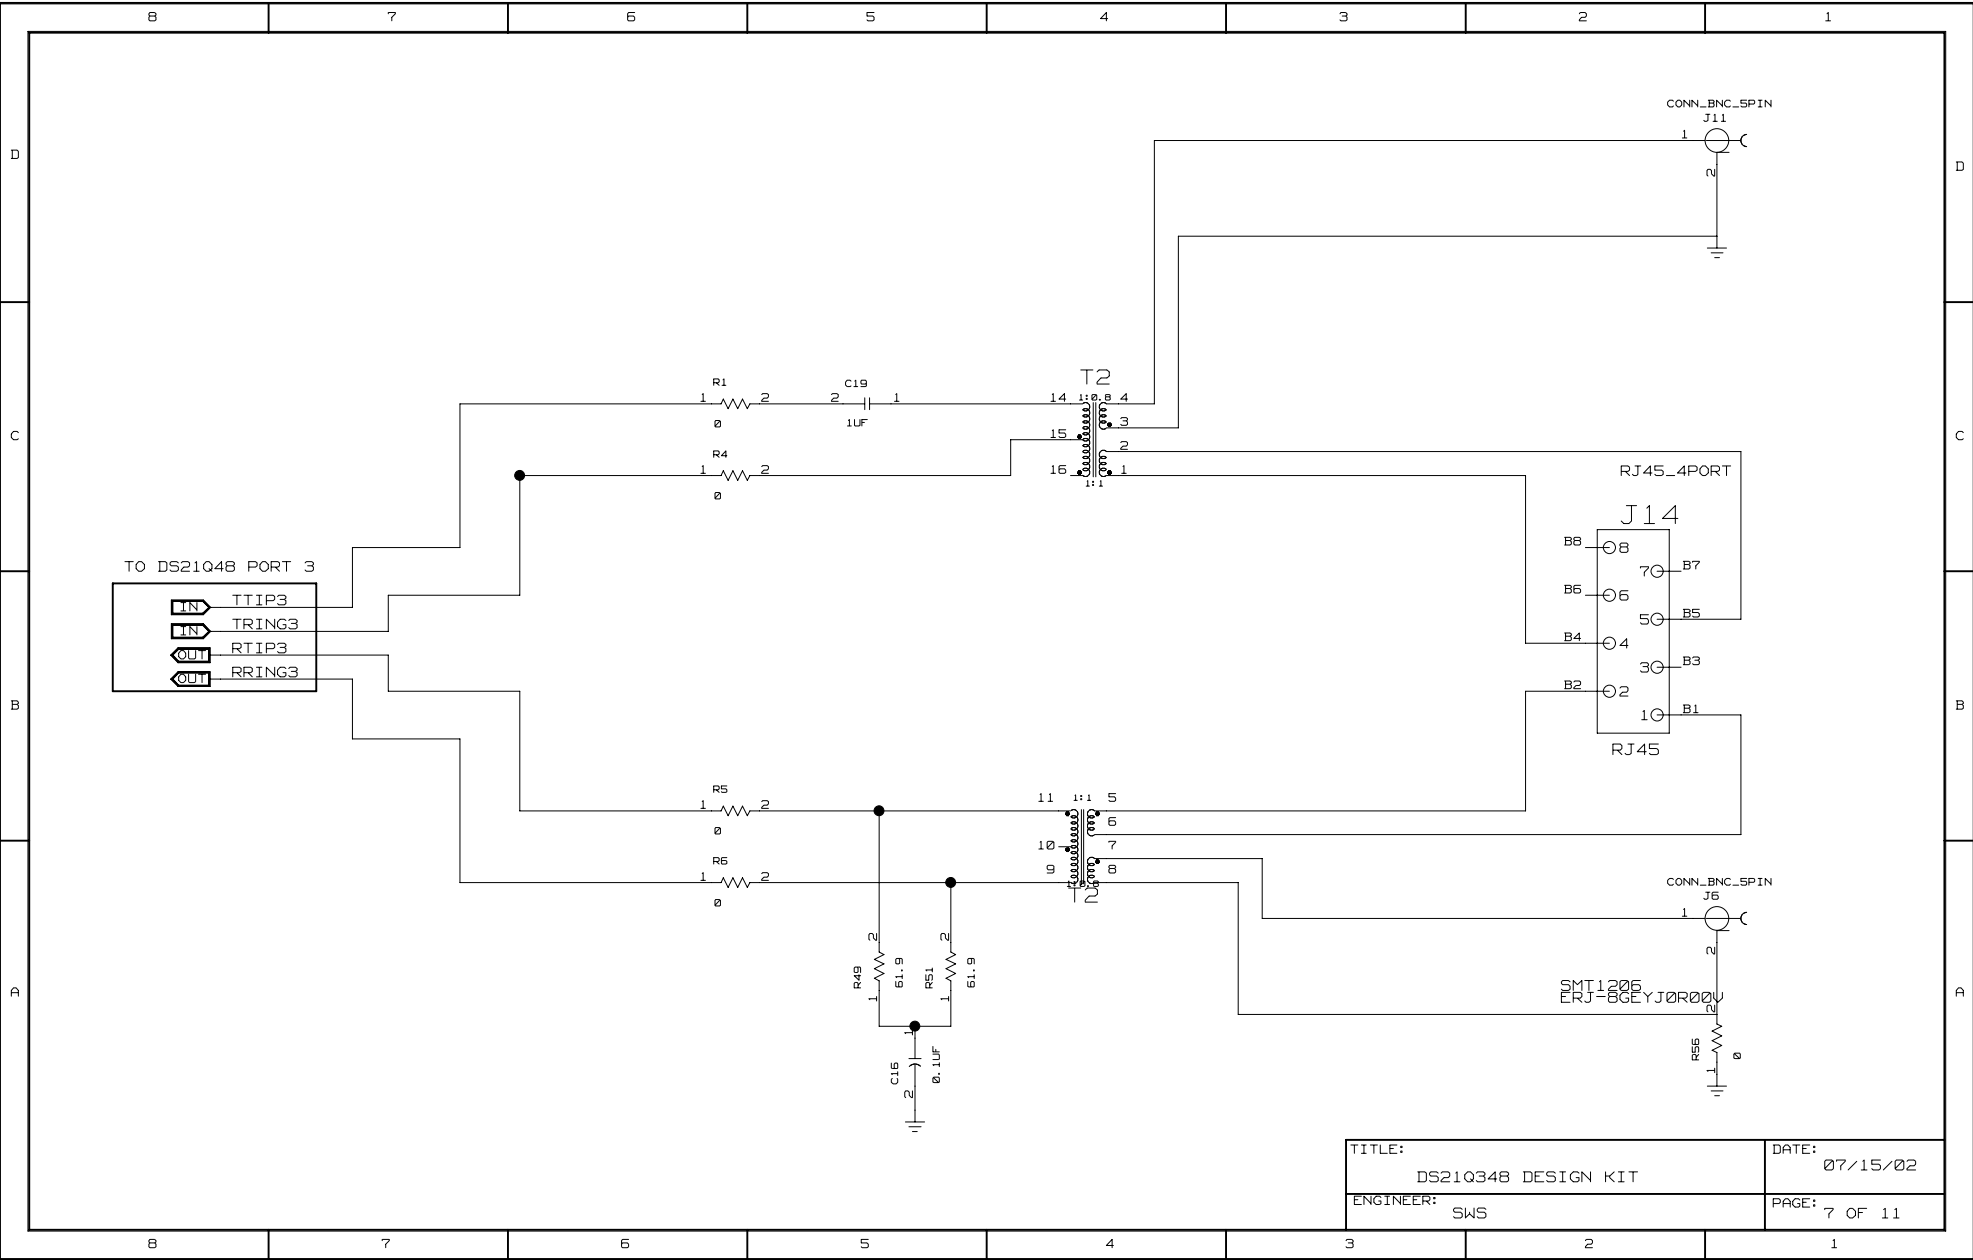

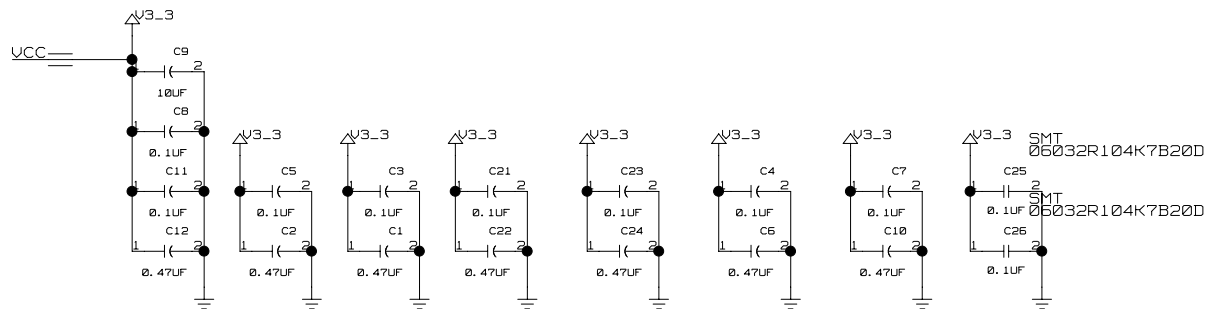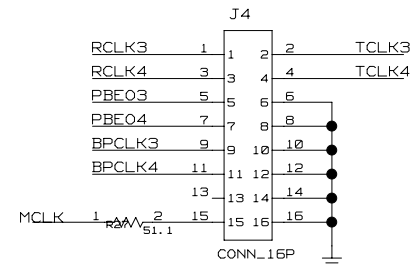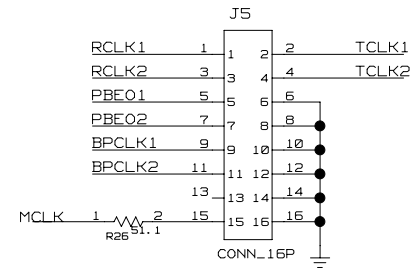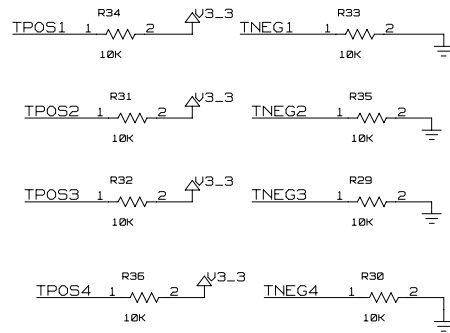

TITLE:	DATE: 07/15/02
ENGINEER: SWS	PAGE: 9 OF 11
DS21Q348 DESIGN KIT	

