

54/74173

54LS/74LS173

4-BIT D-TYPE REGISTER

(With 3-State Outputs)


DESCRIPTION — The '173 is a high speed 4-bit register featuring 3-state outputs for use in bus-organized systems. The clock is fully edge-triggered allowing either a load from the D inputs or a hold (retain register contents) depending on the state of the Input Enable lines ($\overline{IE}_1$, $\overline{IE}_2$). A HIGH on either Output Enable line ($\overline{OE}_1$, $\overline{OE}_2$) brings the output to a high impedance state without affecting the actual register contents. A HIGH on the Master Reset (MR) input resets the register regardless of the state of the Clock (CP), the Output Enable ($\overline{OE}_1$, $\overline{OE}_2$) or the Input Enable ($\overline{IE}_1$, $\overline{IE}_2$) lines.

- FULLY EDGE-TRIGGERED
- 3-STATE OUTPUTS
- GATED INPUT AND OUTPUT ENABLES


ORDERING CODE: See Section 9

PKGS	PIN OUT	COMMERCIAL GRADE	MILITARY GRADE	PKG TYPE
		$V_{CC} = +5.0 \text{ V} \pm 5\%$, $T_A = 0^\circ \text{C to } +70^\circ \text{C}$	$V_{CC} = +5.0 \text{ V} \pm 10\%$, $T_A = -55^\circ \text{C to } +125^\circ \text{C}$	
Plastic DIP (P)	A	74173PC, 74LS173PC		9B
Ceramic DIP (D)	A	74173DC, 74LS173DC	54173DM, 54LS173DM	7B
Flatpak (F)	A	74173FC, 74LS173FC	54173FM, 54LS173FM	4L

CONNECTION DIAGRAM PINOUT A



LOGIC SYMBOL

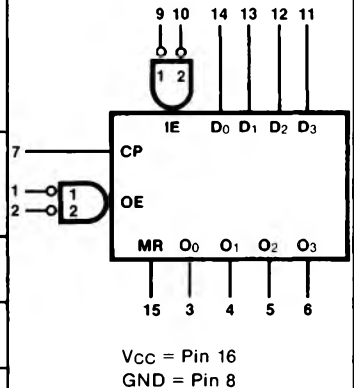

INPUT LOADING/FAN-OUT: See Section 3 for U.L. definitions

PIN NAMES	DESCRIPTION	54/74 (U.L.) HIGH/LOW	54/74LS (U.L.) HIGH/LOW
$D_0 - D_3$	Data Inputs	1.0/1.0	0.5/0.25
$\overline{IE}_1, \overline{IE}_2$	Input Enable Inputs (Active LOW)	1.0/1.0	0.5/0.25
$\overline{OE}_1, \overline{OE}_2$	3-State Output Enable Inputs (Active LOW)	1.0/1.0	0.5/0.25
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	0.5/0.25
MR	Asynchronous Master Reset Input (Active HIGH)	1.0/1.0	0.5/0.25
$O_0 - O_3$	3-State Outputs	130/10 (50)	65/5.0 (25)/(2.5)

TRUTH TABLE

INPUTS					OUTPUT
MR	CP	$\overline{IE}_1$	$\overline{IE}_2$	D_n	Q_n
H	X	X	X	X	L
L	L	X	X	X	Q_n
L	$\downarrow$	H	X	X	Q_n
L	$\downarrow$	X	H	X	Q_n
L	$\downarrow$	L	L	L	L
L	$\downarrow$	L	L	H	H


When either $\overline{OE}_1$ or $\overline{OE}_2$ are HIGH, the output is in the OFF state (high impedance); however this does not affect the contents or sequential operating of the register.

H = HIGH Voltage Level

L = LOW Voltage Level

X = Immaterial

LOGIC DIAGRAM

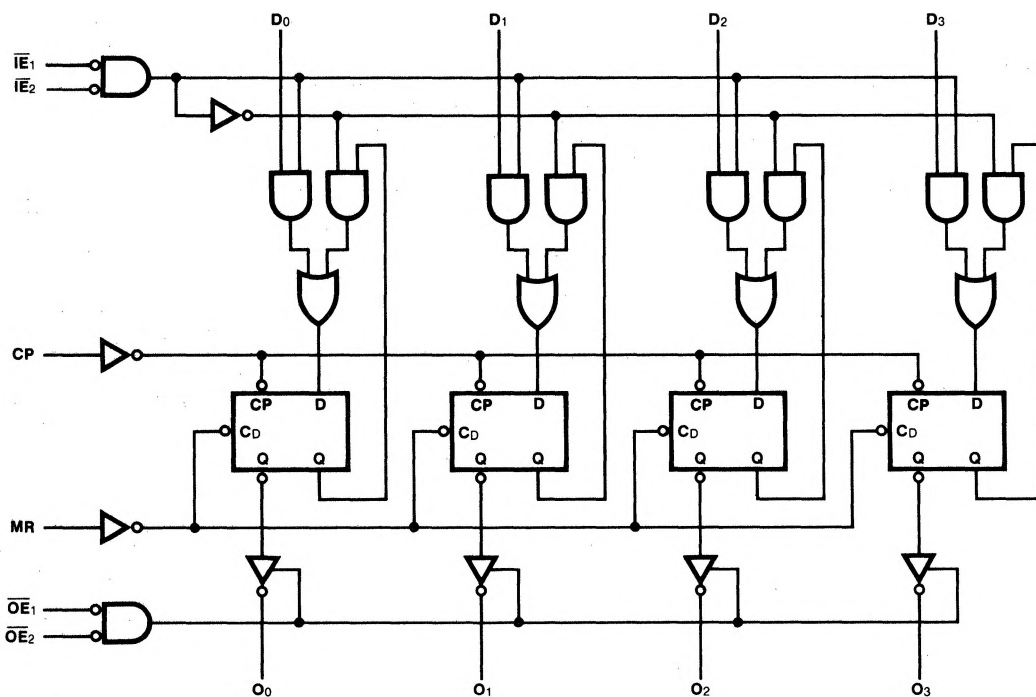

DC CHARACTERISTICS OVER OPERATING TEMPERATURE RANGE (unless otherwise specified)

SYMBOL	PARAMETER	54/74		54/74LS		UNITS	CONDITIONS
		Min	Max	Min	Max		
I _{OS}	Output Short Circuit Current	-30	-70	-20	-100	mA	V _{CC} = Max
I _{CC}	Power Supply Current	72		28		mA	V _{CC} = Max, MR =  CP, $\overline{OE}_1 = 4.5\text{ V}$ $\overline{OE}_2, \overline{IE}_1, \overline{IE}_2, D_n = \text{Gnd}$

AC CHARACTERISTICS: V_{CC} = +5.0 V, T_A = +25°C (See Section 3 for waveforms and load configurations)

SYMBOL	PARAMETER	54/74		54/74LS		UNITS	CONDITIONS
		C _L = 50 pF R _L = 400 Ω		C _L = 15 pF			
		Min	Max	Min	Max		
f _{max}	Maximum Clock Frequency	25		30		MHz	Figs. 3-1, 3-8
t _{PLH}	Propagation Delay	43		40		ns	
t _{PHL}	CP to O _n	31		25			
t _{PHL}	Propagation Delay, MR to O _n	27		25		ns	Figs. 3-1, 3-16
t _{PZH} t _{PZL}	Output Enable Time	30 30		20 20		ns	Figs. 3-3, 3-11, 3-12 R _L = 2 kΩ ('LS173)
t _{PHZ} t _{PLZ}	Output Disable Time	14 20		16 16		ns	Figs. 3-3, 3-11, 3-12 R _L = 2 kΩ ('LS173) C _L = 5 pF

AC OPERATING REQUIREMENTS: V_{CC} = +5.0 V, T_A = +25°C

SYMBOL	PARAMETER	54/74		54/74LS		UNITS	CONDITIONS
		Min	Max	Min	Max		
t _s (H) t _s (L)	Setup Time HIGH or LOW D _n to CP	10	10	10	10	ns	Fig. 3-6
t _h (H) t _h (L)	Hold Time HIGH or LOW D _n to CP	10	10	10	10	ns	
t _s (H) t _s (L)	Setup Time HIGH or LOW $\overline{IE}$ to CP	17	17	17	17	ns	
t _h (H) t _h (L)	Hold Time HIGH or LOW $\overline{IE}$ to CP	2.0	2.0	2.0	2.0	ns	
t _w (L)	CP Pulse Width LOW	20	17	17	17	ns	Fig. 3-8
t _w (H)	MR Pulse Width HIGH	20	17	17	17	ns	Fig. 3-16
t _{rec}	Recovery Time, MR to CP	10	15	15	15	ns	